


SX2-D7-4.8

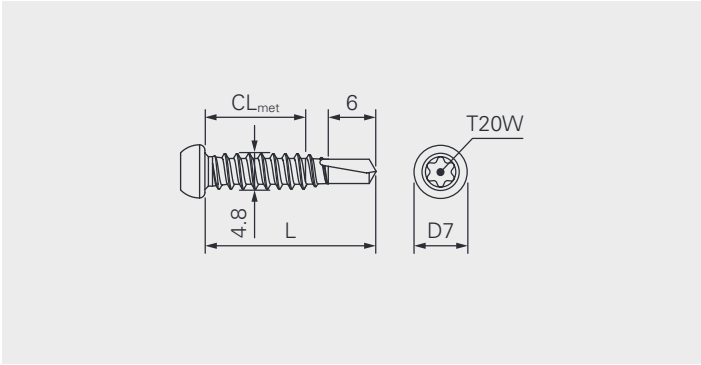

Application

- Fastening of flashings onto sandwich panels
- Fastening of flashings onto metal profile sheets
- Fastening of overlaps of metal profile sheets

Component 1 (t _i)		Component 2 (t _{ii})		Σ _{max} t _i + t _{ii}
Steel	0.40–1.50	Steel	0.40–1.50	3.0
Steel	2×0.40–0.88	Steel	2×0.40–0.88	3.50
Aluminium	0.50–1.50	Aluminium	0.50–1.50	3.0

Fastener material

Austenitic stainless steel A2, hardened drill point

Approvals




Features and Benefits

- Fast and safe self-drilling fastener instead of time consuming riveting
- Aesthetical fastening given by small D7 head shape
- Perfect fit with colored fasteners thanks to special T20-drive

Documentation


Approval document (ETA) | Declaration of performance (DoP)

All measures in mm



Fastener in A2 onto steel

Product code	PU	L	CL _{met}	
SX2-D7-4,8×22	500	22	0-9	1747715
SX2-D7-4,8×22	100			1747691



Accessories/Ancillaries

Product code	PU	Drive	Head drive	
T20W-25-HEX ¼"	10	¼"	T20W	895280
Bit holder ZA ¼"	1		¼"	1162306

All measures in mm

All information is non-binding and without guarantee. Before using the products, all specifications and calculations must be checked by a suitably qualified person and local regulations must be observed. This document is subject to revision. We reserve the right to make technical changes.