


SLG-S-4.8

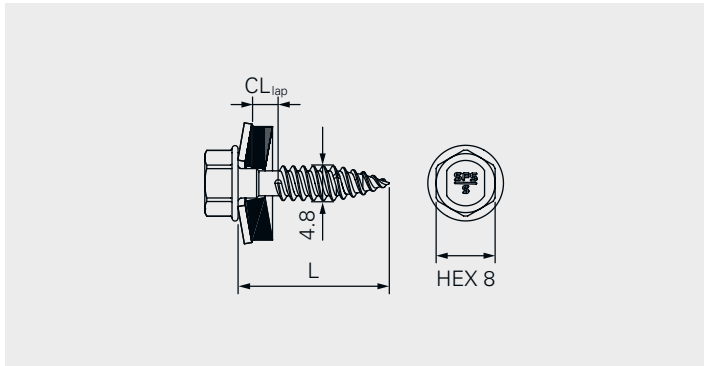

Application

- Fastening of overlaps of profile sheets
- Fastening of overlaps of sandwich panels
- Fastening of flashings onto sandwich panels
- Fastening of flashings onto profile sheets

Component 1 (t _I)		Component 2 (t _{II})		$\Sigma_{\max} t_I + t_{II}$
Steel	0.40–1.0	Steel	0.40–1.0	2.0

Fastener material

- Austenitic stainless steel A2, case hardened speed point
- Sealing washer: Austenitic stainless steel A2, EPDM-seal

Approvals


CE₁₉
ETA-10/0198

Features and Benefits

- Self drilling fastener suitable for fastening of overlaps and flashings
- Fast and chip-free installation thanks to the FastTip
- No scratches on painted metal surfaces thanks to the sharp FastTip
- No torque control required given by free-spin zone
- Secured against unwinding given by cut-off thread-end and free-spin zone
- Cost saving installation due to post-cleaning of chips no longer necessary
- High quality EPDM sealing washer for long-term weather sealing
- High tension and shear resistance achieved by optimized fastener geometry

Documentation

Approval document (ETA) | Declaration of performance (DoP)

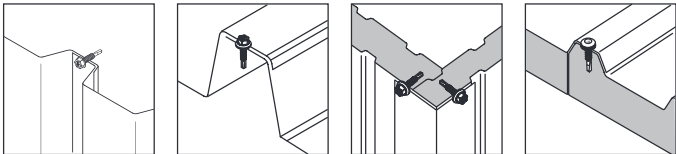

Fastener in A2
onto steel

Product code	PU	L	CL _{lap}	S14	S16	S19
SLG-S-S14-4,8×20	250	20	0.80–2.0	1351313	1378614	1378615



Accessories/Ancillaries

Product code	PU	Drive	Head drive	
E308-¼"-50	1	¼"	HEX8	1646160