



SL2-S-6.3

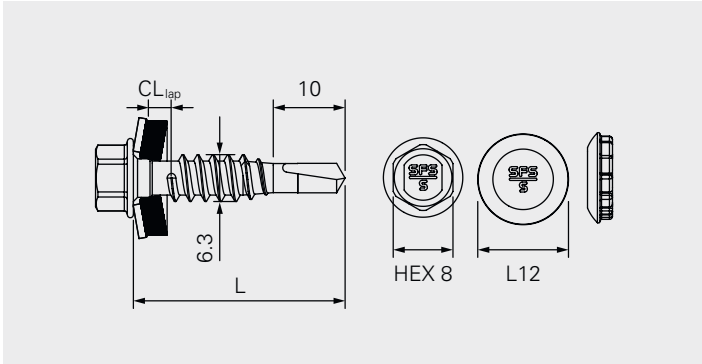

Application

- Fastening of overlaps of profile sheets
- Fastening of overlaps of sandwich panels
- Fastening of flashings onto sandwich panels
- Fastening of flashings onto profile sheets

Component 1 (t _I)		Component 2 (t _{II})		$\Sigma_{max} t_I + t_{II}$
Steel	0.40–1.50	Steel	0.40–1.50	2.50
Aluminium	0.50–1.50	Aluminium	0.50–1.50	3.0

Fastener material

Austenitic stainless steel A2, case hardened drill point
Sealing washer: Austenitic stainless steel A2, EPDM-seal

Approvals




Features and Benefits

- Self drilling fastener suitable for fastening of overlaps and flashings
- No torque control required given by free-spin zone
- Secured against unwinding given by cut-off thread-end and free-spin zone
- High quality EPDM sealing washer for long-term weather sealing

Documentation

Approval document (ETA) | Declaration of performance (DoP)

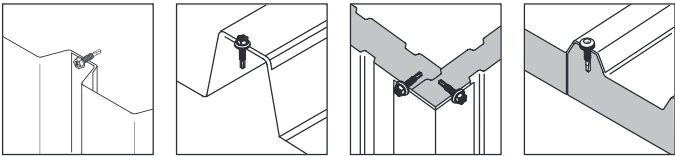

Fastener in A2
onto steel and Aluminium

Product code	PU	L	CL _{lap}	S14	S16	S19
SL2-S-S14-6,3×28	500	28	0.80–2.50	1210627	1133512	1133511
SL2-S-L12-S14-6,3×28	500	28	0.80–2.50	1135477	–	–



Accessories/Ancillaries

Product code	PU	Drive	Head drive	
E308-¼"-50	1	¼"	HEX8	1646160